查询BUL381供应商

BUL381
BUL382

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STM PREFERRED SALESTYPES
- HIGH VOLTAGE CAPABILITY
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- VERY HIGH SWITCHING SPEED
- FULLY CHARACTERISED AT 125°C

APPLICATIONS

- ELECTRONIC BALLASTS FOR FLUORESCENT LIGHTING
- SWITCH MODE POWER SUPPLIES

DESCRIPTION

The BUL381 and BUL382 manufactured using high voltage Multiepitaxial Mesa technology for cost-effective high performance. They use a Hollow Emitter structure to enhance switching speeds.

The BUL series is designed for use in lighting applications and low cost switch-mode power supplies.



TO-220

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage (V_{BE} = 0)	800	V
V_{CEO}	Collector-Emitter Voltage (I_B = 0)	400	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	9	V
I_C	Collector Current	5	A
I_{CM}	Collector Peak Current (t_p < 5 ms)	8	A
I_B	Base Current	2	A
I_{BM}	Base Peak Current (t_p < 5 ms)	4	A
P_{tot}	Total Dissipation at T_c = 25 °C	70	W
T_{stg}	Storage Temperature	-65 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

THERMAL DATA

$R_{thj\text{-}case}$	Thermal Resistance Junction-Case Max	1.78	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-Ambient Max	62.5	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CES}	Collector Cut-off Current (V_{BE} = 0)	V_{CE} = 800 V V_{CE} = 800 V T_j = 125 °C			100 500	µA µA
I_{CEO}	Collector Cut-off Current (I_B = 0)	V_{CE} = 400 V			250	µA
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage	I_C = 100 mA L = 25 mH	400			V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	I_E = 10 mA	9			V
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 1 A I_B = 0.2 A I_C = 2 A I_B = 0.4 A I_C = 3 A I_B = 0.8 A			0.5 0.7 1.1	V V V
$V_{BE(sat)}$*	Base-Emitter Saturation Voltage	I_C = 1 A I_B = 0.2 A I_C = 2 A I_B = 0.4 A			1.1 1.2	V V
h_{FE}*	DC Current Gain	I_C = 2 A V_{CE} = 5 V I_C = 10 mA V_{CE} = 5 V	8 10			
t_{ON} t_s t_f	RESISTIVE LOAD Turn-on Time Storage Time Fall Time	V_{CC} = 250 V I_C = 2 A I_{B1} = 0.4 A I_{B2} = -0.4 A (for BUL381only) t_p = 30 µs	 1.4		 1 2.2 800	 µs µs ns
t_{ON} t_s t_f	RESISTIVE LOAD Turn-on Time Storage Time Fall Time	V_{CC} = 250 V I_C = 2 A I_{B1} = 0.4 A I_{B2} = -0.4 A (for BUL382 only) t_p = 30 µs	 1.7		 1 2.5 800	 µs µs ns
t_s t_f	INDUCTIVE LOAD Storage Time Fall Time	I_C = 2 A V_{CL} = 250 V I_{B1} = 0.4 A I_{B2} = -0.8 A L = 200 µH		1.7 75	2.6 120	µs ns
t_s t_f	INDUCTIVE LOAD Storage Time Fall Time	I_C = 2 A V_{CL} = 250 V I_{B1} = 0.4 A I_{B2} = -0.8 A L = 200 µH T_j = 125 °C		2.6 150		µs ns

* Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %

Safe Operating Areas

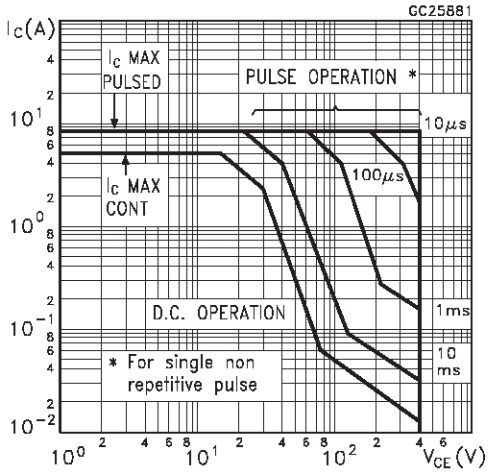

Derating Curves

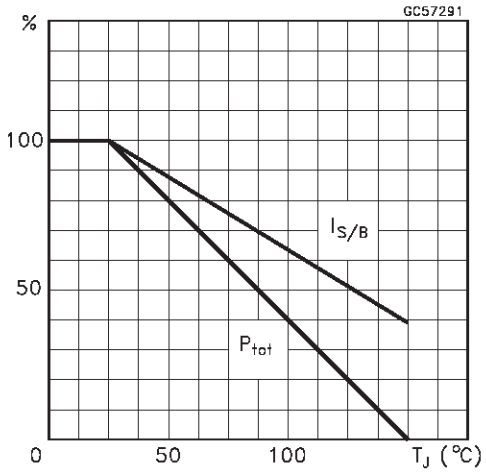

DC Current Gain

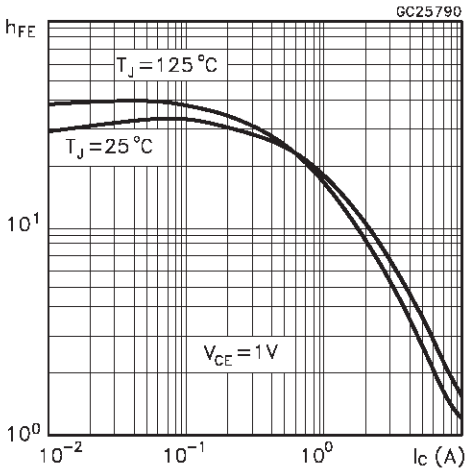

DC Current Gain

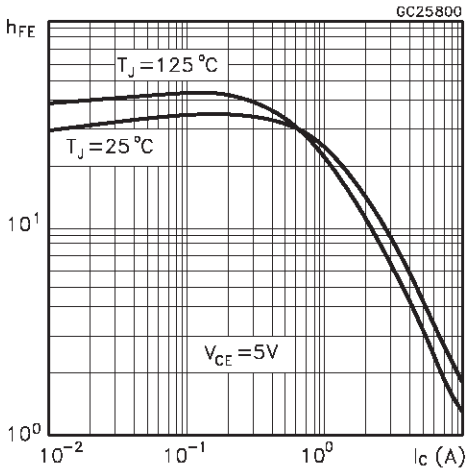

Collector Emitter Saturation Voltage

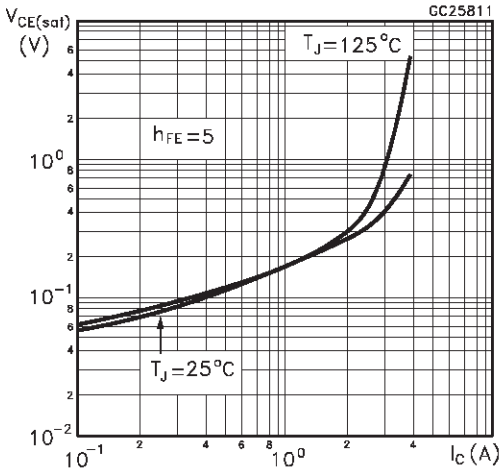

Base Emitter Saturation Voltage

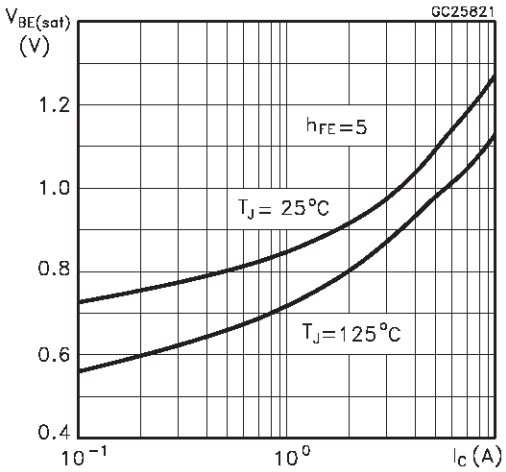

Reverse Biased SOA

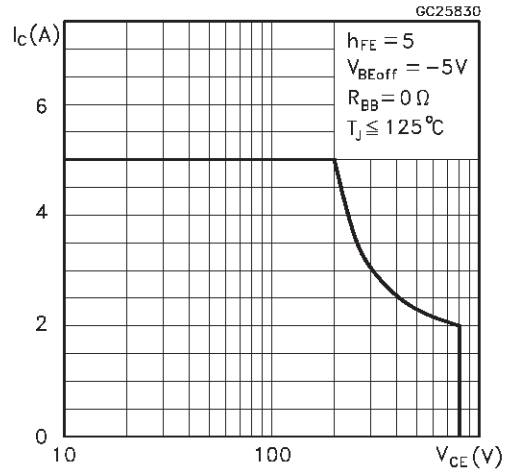

Inductive Fall Time

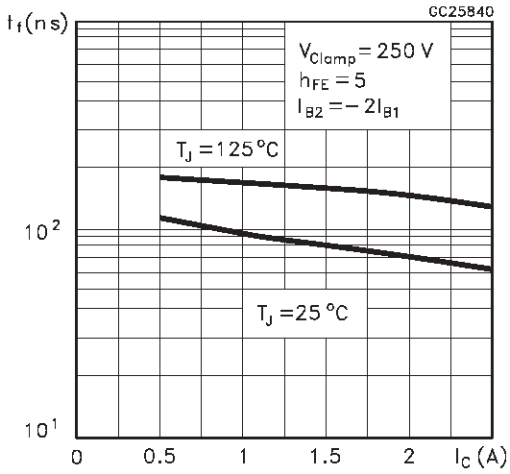

Inductive Storage Time

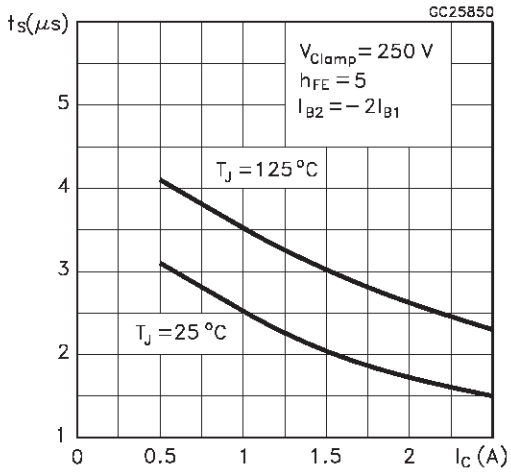

Inductive Fall Time

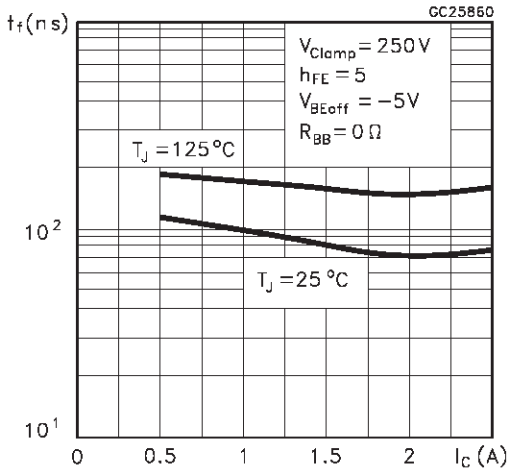

Inductive Storage Time

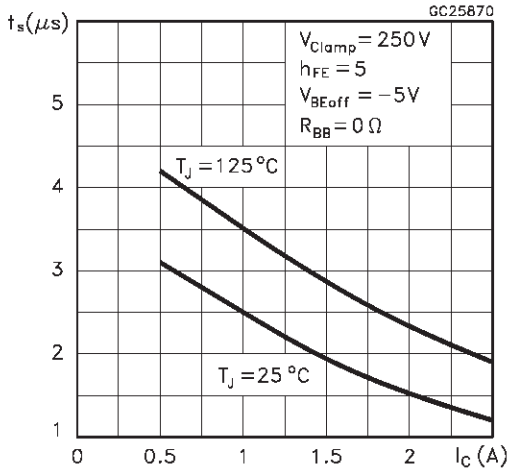

Resistive Load Switching Test Ciurcuit

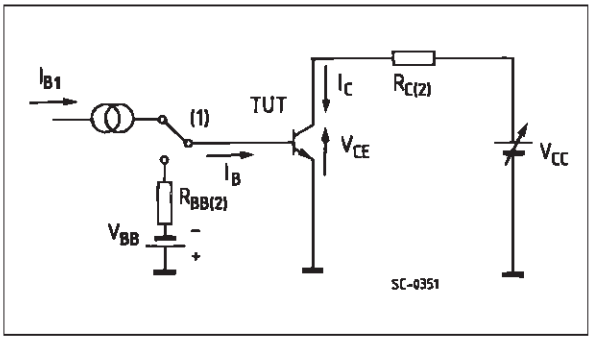

1) Fast electronic switch
2) Non-inductive Resistor

Reverse BSOA and Inductive Load Switching Test Ciurcuit

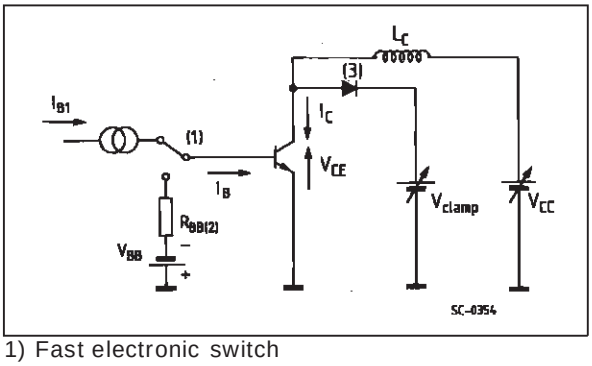

1) Fast electronic switch
2) Non-inductive Resistor
3) Fast recovery Rectifier

TO-220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

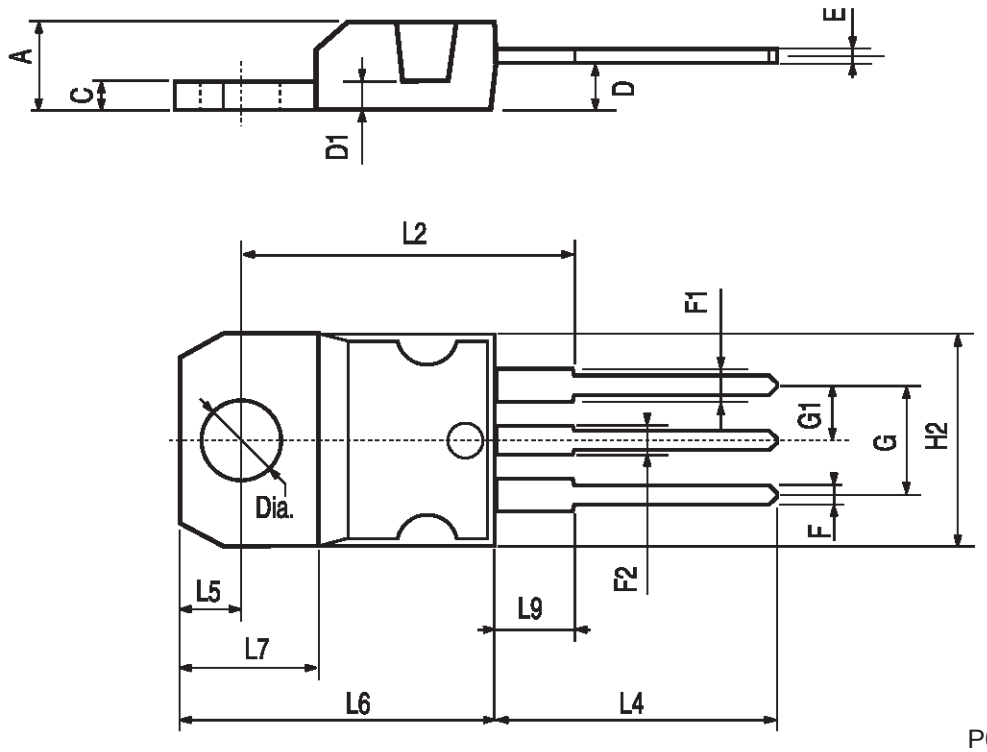

P011C

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

.